

brevi reco
Rotary Cultivators



brevi
**Rotary
Cultivators**
recommended ✓

Quality and value you can trust

Proven, robust, efficient and cost-effective machinery from RECO comes with service and support that will never let you down.

So we are proud to represent Brevi, the Italian brand of cultivation machinery that in Europe has become synonymous with reliability – as well as outstanding quality and unbeatable value.

As the sole UK distributor of Brevi rotary cultivators, we are delighted to offer growers in this country the opportunity to benefit from machinery which is founded on advanced R&D that responds to the needs of the modern industry.

State-of-the-art production facilities, top quality manufacturing and specially sourced steel that combines high tensile strength with elasticity are also key Brevi components.

The highly competitive prices we are able to offer are backed by the rich manufacturing heritage of the Breviglieri (hence Brevi) family. In Italy, the name Breviglieri is associated with 'machines for working the soil'. Since 1949, the company has brought technical innovation to the task of working on the land. This latest range of rotary cultivators continues that tradition.



recommended ✓

Brevi Rotary Cultivators

Rotary cultivators represent the original product created by the Brevi company which have developed into the sophisticated range of machines available today.


Models are available from 0.85 to 3.0m working widths in fixed frame and up to 5.0m in the folding frame version.

Mini-range cultivators span 0.85 to 1.85m working widths for 10 to 60hp tractors and are fitted with a shearbolt PTO. These machines are particularly suited to working in orchards, nurseries, vineyards, parks and gardens.

Top range cultivators for 50 to 250hp tractors cover 1.55 to 3.0m working widths in fixed frame and up to 5.0m for folding frame, and fitted with a disc-clutch PTO.

With their Italian heritage, Brevi Rotary Cultivators are suited to working in extreme conditions such as difficult, dry, compact or stony soils, with or without high levels of residue and designed to meet the working needs of both farmers and contractors.



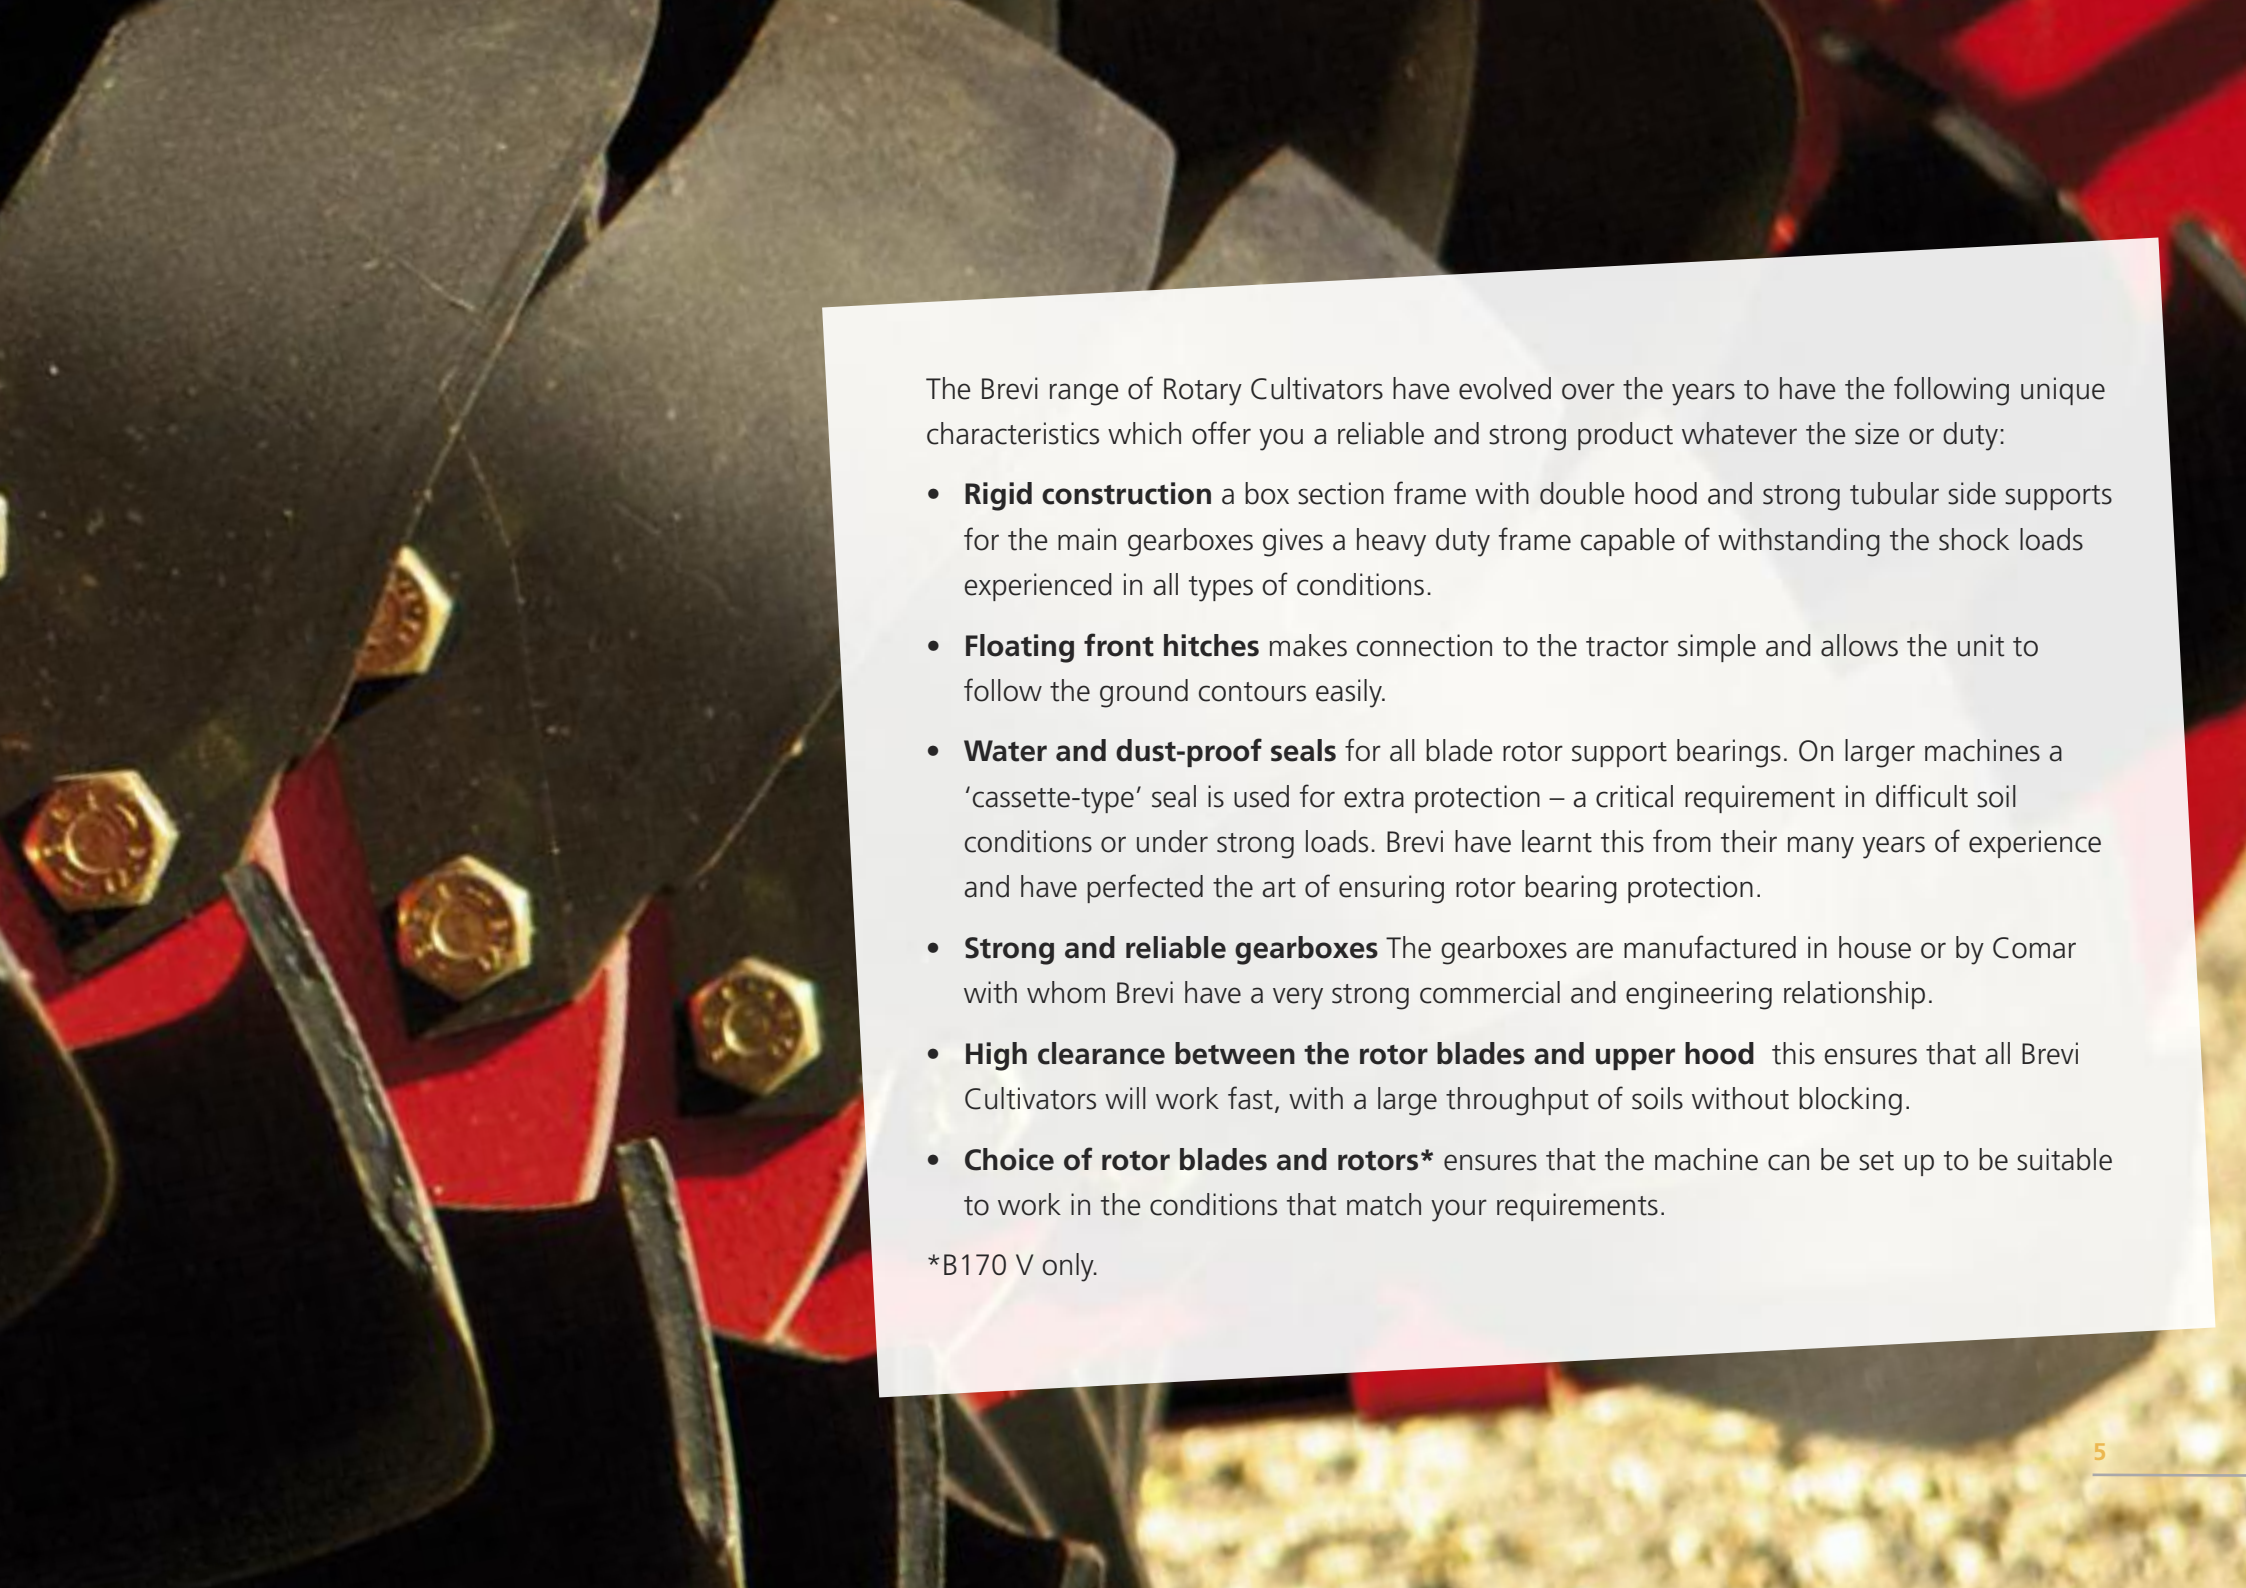

The Brevi range of Rotary Cultivators have evolved over the years to have the following unique characteristics which offer you a reliable and strong product whatever the size or duty:

- **Rigid construction** a box section frame with double hood and strong tubular side supports for the main gearboxes gives a heavy duty frame capable of withstanding the shock loads experienced in all types of conditions.
- **Floating front hitches** makes connection to the tractor simple and allows the unit to follow the ground contours easily.
- **Water and dust-proof seals** for all blade rotor support bearings. On larger machines a 'cassette-type' seal is used for extra protection – a critical requirement in difficult soil conditions or under strong loads. Brevi have learnt this from their many years of experience and have perfected the art of ensuring rotor bearing protection.
- **Strong and reliable gearboxes** The gearboxes are manufactured in house or by Comar with whom Brevi have a very strong commercial and engineering relationship.
- **High clearance between the rotor blades and upper hood** this ensures that all Brevi Cultivators will work fast, with a large throughput of soils without blocking.
- **Choice of rotor blades and rotors*** ensures that the machine can be set up to be suitable to work in the conditions that match your requirements.

*B170 V only.

B25 S/B55 F

B25 S

The smallest of the Brevi range of rotary cultivators, the B25 S features 4 blades per flange, chain drive using high quality chain with automatic tensioner, single-speed gearbox and side-shift headstock (up to 20cms) as standard.

Suitable for use with 10 – 30hp tractors, this range offers working widths between 0.85 and 1.25m.

B55 F

This range is rated for 25 – 60hp tractors available in working widths between 1.25 – 1.85m.

Most of the features are the same as the B25 S. The fixed headstock features adjustable hitches which enable a small off-set of up to 10cms.



reco



B25 S Technical data

| | PTO speed | Rotor speed | Tractor power | Weight | Width (work) | Width (transport) | Tines | Cultivation depth |
|-------------|-----------|-------------|---------------|--------|--------------|-------------------|-------|-------------------|
| Model | rpm | rpm | hp | kg | cm | cm | n. | cm |
| B25 S 0.85m | 540 | 184 | 10-20 | 145 | 85 | 97 | 16 | 5-15 |
| B25 S 1.05m | 540 | 184 | 15-25 | 160 | 105 | 117 | 20 | 5-15 |
| B25 S 1.25m | 540 | 184 | 20-30 | 175 | 125 | 137 | 24 | 5-15 |

B55 F Technical data

| | PTO speed | Rotor speed | Tractor power | Weight | Width (work) | Width (transport) | Tines | Cultivation depth |
|-------------|-----------|-------------|---------------|--------|--------------|-------------------|-------|-------------------|
| Model | rpm | rpm | hp | kg | cm | cm | n. | cm |
| B55 F 1.25m | 540 | 230 | 25-35 | 245 | 125 | 144 | 36 | 5-15 |
| B55 F 1.45m | 540 | 230 | 30-45 | 265 | 145 | 164 | 42 | 5-15 |
| B55 F 1.65m | 540 | 230 | 35-50 | 290 | 165 | 184 | 48 | 5-15 |
| B55 F 1.85m | 540 | 230 | 35-60 | 322 | 185 | 204 | 54 | 5-15 |



reco

agricultural & groundcare machinery

brampton road, huntingdon, cambs, pe29 3bs

01480 455151

sales@reco.co.uk

www.reco.co.uk

