

brevi reco
Rotary Cultivators



brevi
**Rotary
Cultivators**
recommended ✓

Quality and value you can trust

Proven, robust, efficient and cost-effective machinery from RECO comes with service and support that will never let you down.

So we are proud to represent Brevi, the Italian brand of cultivation machinery that in Europe has become synonymous with reliability – as well as outstanding quality and unbeatable value.

As the sole UK distributor of Brevi rotary cultivators, we are delighted to offer growers in this country the opportunity to benefit from machinery which is founded on advanced R&D that responds to the needs of the modern industry.

State-of-the-art production facilities, top quality manufacturing and specially sourced steel that combines high tensile strength with elasticity are also key Brevi components.

The highly competitive prices we are able to offer are backed by the rich manufacturing heritage of the Breviglieri (hence Brevi) family. In Italy, the name Breviglieri is associated with 'machines for working the soil'. Since 1949, the company has brought technical innovation to the task of working on the land. This latest range of rotary cultivators continues that tradition.



recommended ✓

Brevi Rotary Cultivators

Rotary cultivators represent the original product created by the Brevi company which have developed into the sophisticated range of machines available today.


Models are available from 0.85 to 3.0m working widths in fixed frame and up to 5.0m in the folding frame version.

Mini-range cultivators span 0.85 to 1.85m working widths for 10 to 60hp tractors and are fitted with a shearbolt PTO. These machines are particularly suited to working in orchards, nurseries, vineyards, parks and gardens.

Top range cultivators for 50 to 250hp tractors cover 1.55 to 3.0m working widths in fixed frame and up to 5.0m for folding frame, and fitted with a disc-clutch PTO.

With their Italian heritage, Brevi Rotary Cultivators are suited to working in extreme conditions such as difficult, dry, compact or stony soils, with or without high levels of residue and designed to meet the working needs of both farmers and contractors.



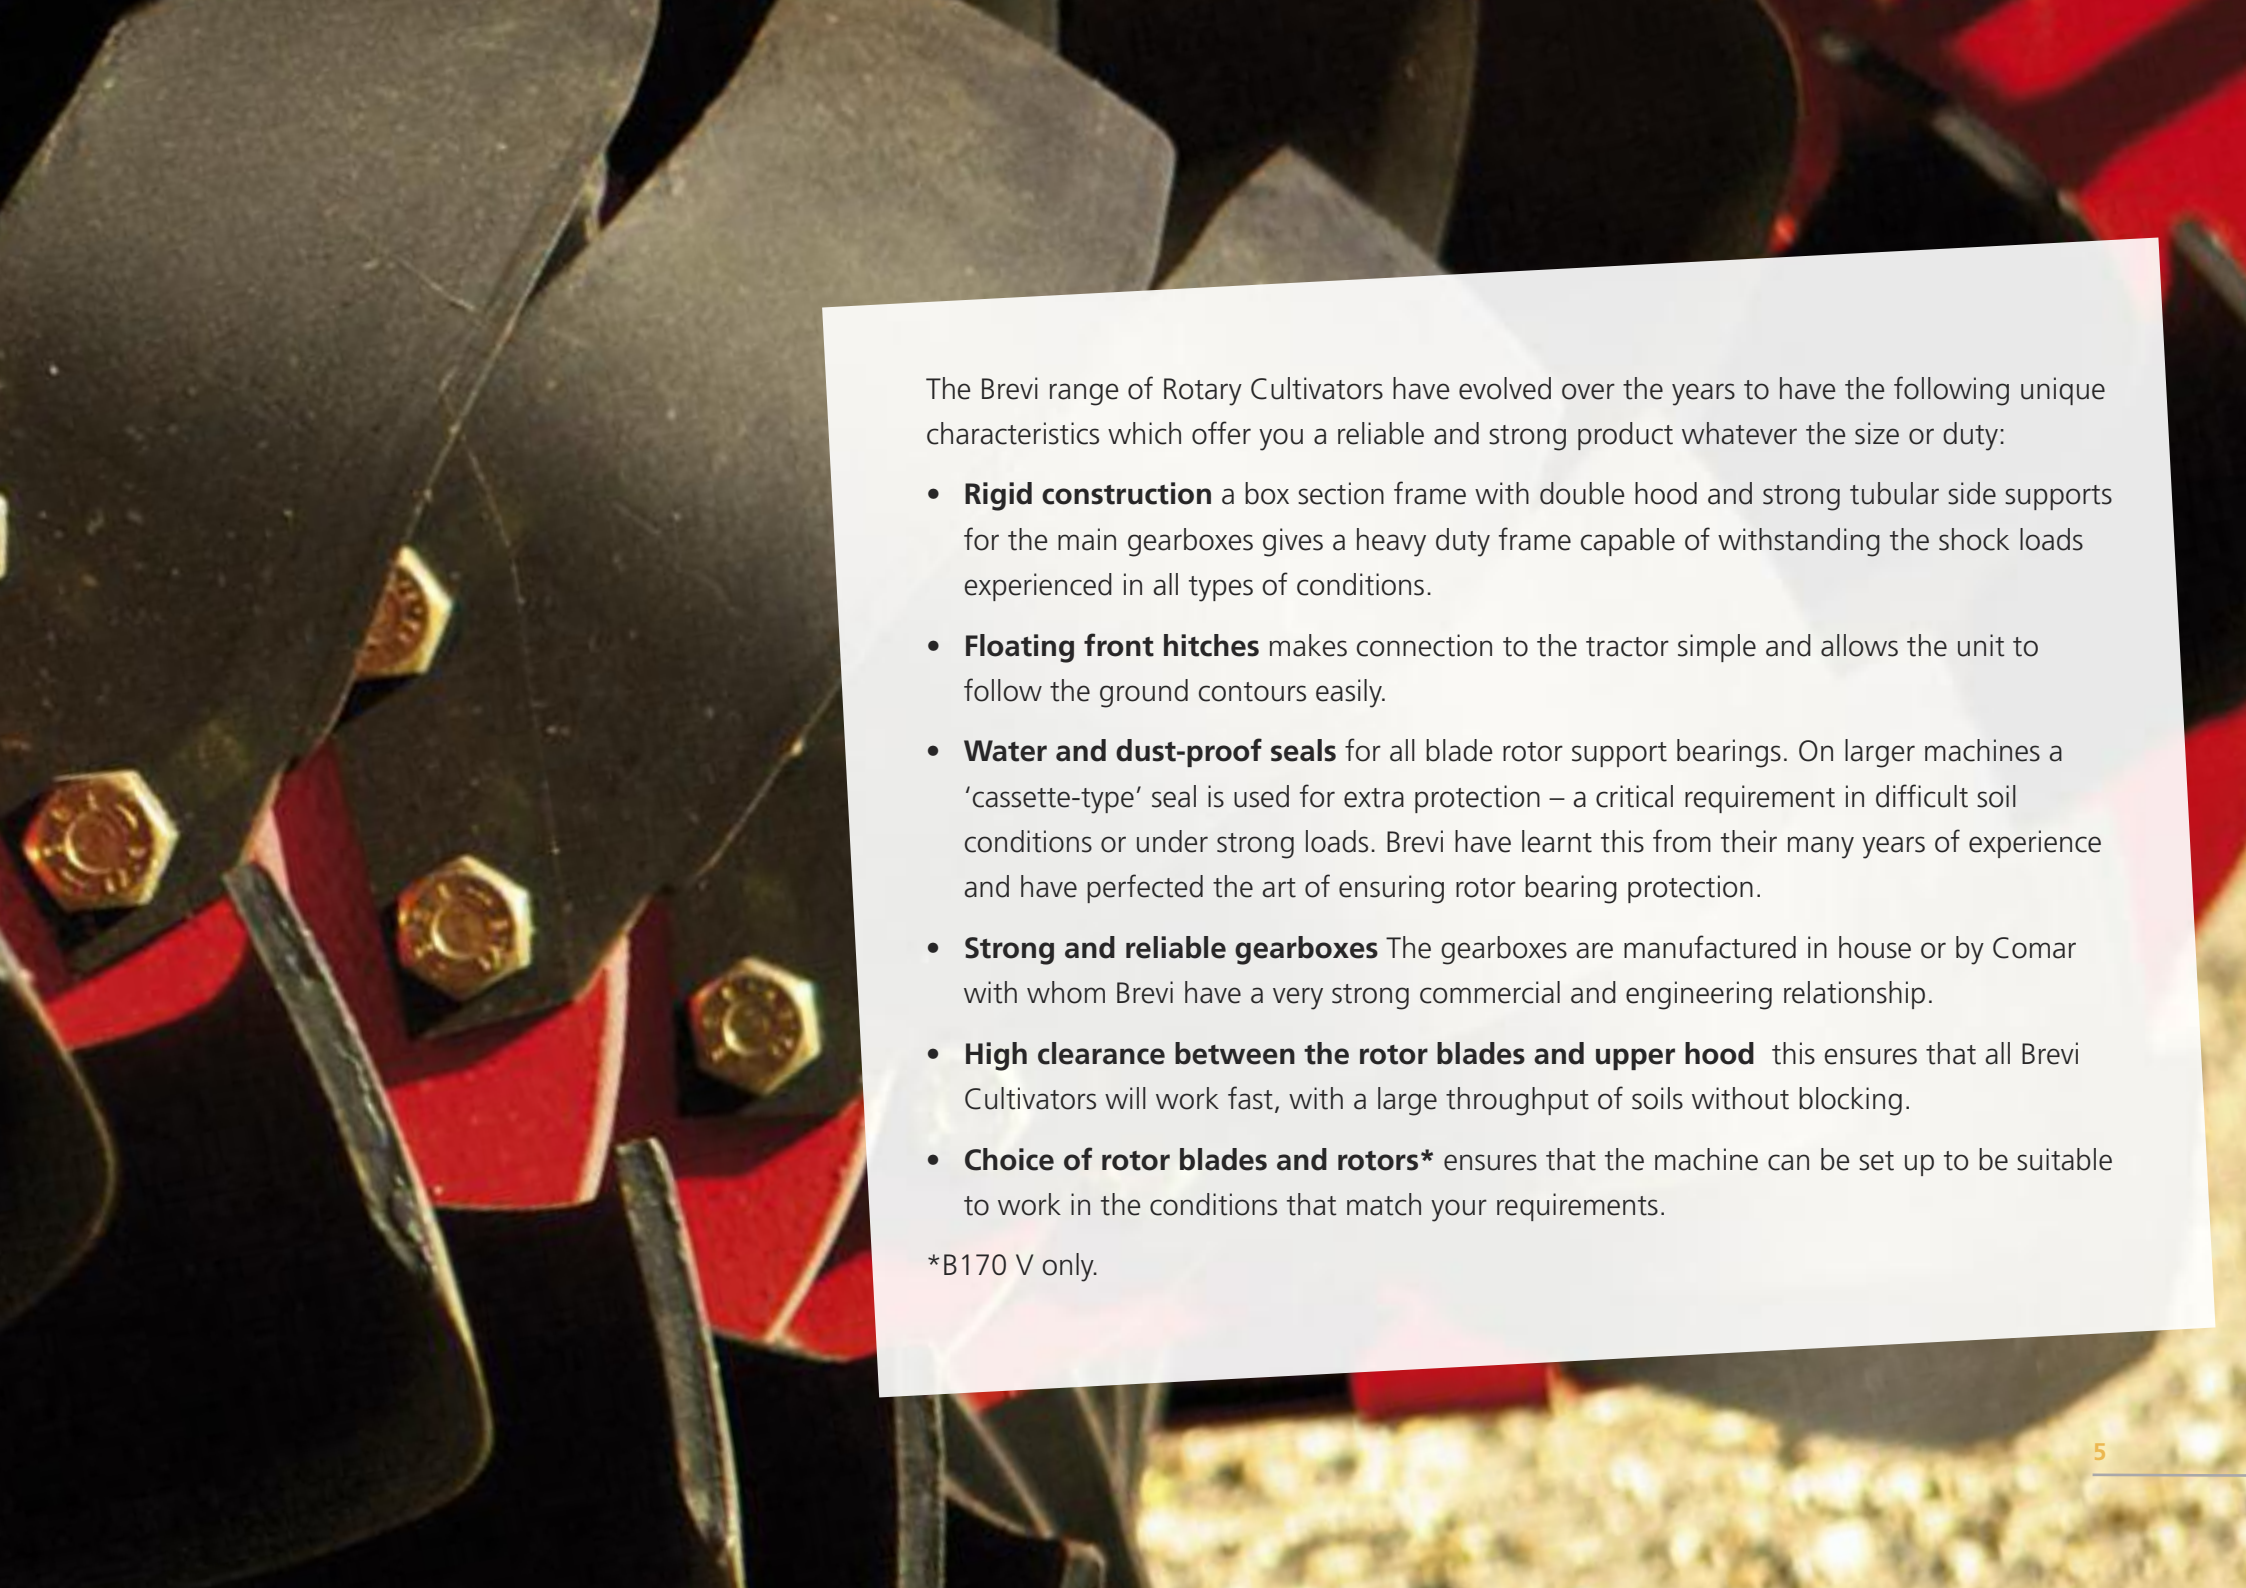

The Brevi range of Rotary Cultivators have evolved over the years to have the following unique characteristics which offer you a reliable and strong product whatever the size or duty:

- **Rigid construction** a box section frame with double hood and strong tubular side supports for the main gearboxes gives a heavy duty frame capable of withstanding the shock loads experienced in all types of conditions.
- **Floating front hitches** makes connection to the tractor simple and allows the unit to follow the ground contours easily.
- **Water and dust-proof seals** for all blade rotor support bearings. On larger machines a 'cassette-type' seal is used for extra protection – a critical requirement in difficult soil conditions or under strong loads. Brevi have learnt this from their many years of experience and have perfected the art of ensuring rotor bearing protection.
- **Strong and reliable gearboxes** The gearboxes are manufactured in house or by Comar with whom Brevi have a very strong commercial and engineering relationship.
- **High clearance between the rotor blades and upper hood** this ensures that all Brevi Cultivators will work fast, with a large throughput of soils without blocking.
- **Choice of rotor blades and rotors*** ensures that the machine can be set up to be suitable to work in the conditions that match your requirements.

*B170 V only.

B83/B123

B83

The B83 range of cultivators is equipped for mid-range horsepowers (50 – 90) and features an oil-bath gear side transmission and 6 blades per flange.

Available in working widths of between 1.55m – 2.30m, the B83 is supplied with a heavy duty Brevi single-speed gearbox as standard. A multispeed gearbox is available as an optional extra.

B123

The B123 cultivator is suitable for use with 60 – 120hp tractors and features a Brevi heavy-duty case multi-speed gearbox as standard. This model is fitted with a heavy-duty 3 point linkage headstock enabling it to be used in combination with a seed drill.

The rotor shaft bearings are protected by a cassette-style seal and labyrinth assembly to ensure reliability even in the worst of conditions.

The B123 is available as a basic cultivator with side skids and rear adjustable zinc plated doors or with a choice of a rear 405mm diameter crumbler or 406mm packer roller.



B83 Technical data

	PTO speed	Rotor speed	Tractor power	Weight	Width (work)	Width (transport)	Tines	Cultivation depth
Model	rpm	rpm	hp	kg	cm	cm	n.	cm
B83 1.55m	540	242	50-60	440	155	170	42	10-20
B83 1.80m	540	242	50-70	470	180	195	48	10-20
B83 2.05m	540	242	60-80	510	205	220	54	10-20
B83 2.30m	540	242	70-90	550	230	245	60	10-20





Options available

Front wheels

Side disc kit (B123 only)

Eradicator tines (B123 only)

Hydraulic seed linkage (B123 only)

Hydraulic rear roller adjustment (B123 only)

Multi-speed gearbox (B 83 only, standard on the B123)



B123 Technical data

Model	PTO speed rpm	Rotor speed rpm	Tractor power hp	Weight kg	+ hood	Crumbler roller	Packer roller	Width (work) cm	Width (transport) cm	Tines n.	Cultivation depth cm
B123 2.05m	540	214/240/302	60-70	750		-	-	205	220	48	10-25
	1000	293/374									
B123 2.30m	540	214/240/302	60-90	800	1000	1100	230	245	54	54	10-25
	1000	293/374									
B123 2.50m	540	214/240/302	70-100	850	1050	1150	250	265	60	60	10-25
	1000	293/374									
B123 2.80m	540	214/240/302	80-110	900	1100	1200	280	295	66	66	10-25
	1000	293/374									
B123 3.00m	540	214/240/302	90-120	950	1150	1250	300	315	72	72	10-25
	1000	293/374									



reco

agricultural & groundcare machinery

brampton road, huntingdon, cambs, pe29 3bs

01480 455151

sales@reco.co.uk

www.reco.co.uk

