

Specifications

MODEL	EX35	EX35H	EX40	EX40H	EX45	EX45H	EX50	EX50H
ENGINE								
Model(Cab)	38183LXM (38183LVM)	38183LXM (38183LVM)	4A200LXM (4A200LVM)	4A200LXM (4A200LVM)	4A220LXM (4A220LVM)	4A220LXM (4A220LVM)	4B243LXM (4B243LVM)	4B243LXM (4B243LVM)
Type	30yl., In-line Vertical, Water-cooled 4-cycle diesel engine		4Cyl., In-line Vertical, Water-cooled 4-cycle diesel engine					
Engine gross PTO(Cab)	HP 28.5(27.5)	38 27(26.1)	41 34(32.1)	45 32.5(30.2)	45 38(35.9)	45 36(34)	50(49) 39.5(38.3)	50(49) 37.5(35.5)
Displacement	cc 1,826	2,276	1,999	2,197	2,197	2,197	2,435	2,435
Rated revolution	rpm 2,600	2,600	2,600	2,600	2,600	2,600	2,600	2,600
Fuel tank capacity	ℓ 45	45	45	45	45	45	45	45
DRIVE TRAIN								
Clutch	Dry type single stage	None	Dry type single stage	None	Dry type single stage	None	Dry type single stage	None
Transmission	Synchro shuttle	Hydrostatic drive	Synchro shuttle	Hydrostatic drive	Synchro shuttle	Hydrostatic drive	Synchro shuttle	Hydrostatic drive
Speeds	F24/R24 3 Range HST	F24/R24 3 Range HST	F24/R24 3 Range HST	F24/R24 3 Range HST	F24/R24 3 Range HST	F24/R24 3 Range HST	F24/R24 3 Range HST	F24/R24 3 Range HST
Differential lock	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Brake	Wet disc type	Wet disc type	Wet disc type	Wet disc type	Wet disc type	Wet disc type	Wet disc type	Wet disc type
PTO	Hydrostatic, Independent	Hydrostatic, Independent	Hydrostatic, Independent	Hydrostatic, Independent	Hydrostatic, Independent	Hydrostatic, Independent	Hydrostatic, Independent	Hydrostatic, Independent
Rear	540	540	540	540	540	540	540	540
Mid	2,000	2,000	2,000	2,000	2,000	2,000	2,000	2,000
HYDRAULIC SYSTEM								
Pump	Gear(Tandem)	Gear(Tandem)	Gear(Tandem)	Gear(Tandem)	Gear(Tandem)	Gear(Tandem)	Gear(Tandem)	Gear(Tandem)
Pump capacity(Max. flow rate)	ℓ/min 57.8	63.9	63.9	63.9	63.9	63.9	63.9	63.9
3-point hitch	Cat. I	Cat. I	Cat. I	Cat. I	Cat. I	Cat. I	Cat. I	Cat. I
Hitch Lift Capacity at Lift Link End Hitch	kg 1,172	1,334	1,334	1,334	1,334	1,334	1,334	1,334
Lift Capacity at 24 behind LP	kg 1,081	1,131	1,131	1,131	1,131	1,131	1,131	1,131
Hydraulic lift control system	Position, Draft, Mixed control	Position, Draft, Mixed control	Position, Draft, Mixed control	Position, Draft, Mixed control	Position, Draft, Mixed control	Position, Draft, Mixed control	Position, Draft, Mixed control	Position, Draft, Mixed control
Steering	Hydrostatic Power Steering	Hydrostatic Power Steering	Hydrostatic Power Steering	Hydrostatic Power Steering	Hydrostatic Power Steering	Hydrostatic Power Steering	Hydrostatic Power Steering	Hydrostatic Power Steering
TIRE SIZE								
Front AG, (TURF, INDUSTRIAL)	7-16(27-8.5-15, 27-10.5-15)	8-16(27-8.5-15, 10-16.5)	9-5-16(29-12.5-15, 12-16.5)	9-5-16(29-12.5-15, 12-16.5)	9-5-16(29-12.5-15, 12-16.5)	9-5-16(29-12.5-15, 12-16.5)	9-5-16(29-12.5-15, 12-16.5)	9-5-16(29-12.5-15, 12-16.5)
Rear AG, (TURF, INDUSTRIAL)	12.4-24(41-14-20, 43-16-20)	13.6-24(41-14-20, 14.9-24)	13.6-26(21.5L-16.1, 17.5L-24)	13.6-26(21.5L-16.1, 17.5L-24)	13.6-26(21.5L-16.1, 17.5L-24)	13.6-26(21.5L-16.1, 17.5L-24)	13.6-26(21.5L-16.1, 17.5L-24)	13.6-26(21.5L-16.1, 17.5L-24)
TRAVELING SPEEDS								
Forward/2800 rpm	km/h 0.17-25.2	0-27.8	0.18-26.4	0-29.1	0.19-27.8	0-30.7	0.19-27.8	0-30.7
Reverse/2800 rpm	km/h 0.15-22.4	0-27.8	0.16-23.4	0-29.1	0.16-24.7	0-30.7	0.16-24.7	0-30.7
DIMENSIONS								
Overall length-includes 3-pt hitch	mm 3,280						3,410	
Overall width-minimum tread(Cab)	mm 1,565		1,625				1,760	
Overall height(Cab)	mm 2,385(2,425)		2,415(2,455)		2,445(2,485)		2,445(2,485)	
Wheelbase	mm 1,767		1,880		1,880		1,880	
Min. ground clearance(Cab)	mm 325(365)		340(375)		370(405)		370(405)	
Tread	mm 1,245		1,248		1,365		1,365	
Min. turning radius-with brake	mm 1,237-1,347		1,290-1,490(1,262-1,490)		1,278-1,478(1,370-1,515)		1,278-1,478(1,370-1,515)	
Weight(Cab)	kg 1,667(1,877)	1,664(1,874)	1,780(1,990)	1,745(1,955)	1,792(2,002)	1,780(1,990)	1,800(2,010)	1,785(1,995)

※ NOTE : The specifications are subject to change for the purpose of improvement without any notice.



**Kioti Tractor/
Daedong Industrial. Co., Ltd.**
1422-5, Seocho-Dong, Seocho-Ku, Seoul, Korea
tel 82-2-3470-7454-9 • fax 82-2-3470-7485
web www.daedong.co.kr

Dealer Imprint Area



Standard Equipment

CAB & ROPS

- One lever Joystick for Front Loader
- Creeper Gear (Manual)
- Double acting valve (1 set)
- Rear Differential Lock
- Oil Cooler
- Installation Device for Beacon Lamp(without lamp)
- Rear View Mirror
- Wet Disc Brake
- Crank Adjustable Lift Link
- Hydraulic Power Steering
- Hand Parking Brake (Manual)
- Towing Hook
- Horn
- Telescopic 3 Point Hitch Ends
- Telescopic Stabilizers
- 7 Pin Socket
- Tilt Steering Wheel
- Swing Draw Bar
- Foot Throttles (Manual)
- Removable Drawbar/Adjustable Seat
- Cupholder

CAB

- Air Conditioner
- Heater
- Front / Rear Windshield Wiper
- Front / Rear Working Lamp(2EA)
- Side glass / Rear glass door(2EA)
- Cigar socket

Optional Equipments

CAB & ROPS

- 2nd double acting valve
- Weight : Front(85kg/5EA)
Rear(100kg/4EA)

CAB

- CDplayer

ROPS

- Canopy



run ahead of the pack



*It all
Happens by Design*



LCD Display

- Newly decorated LCD panel provides all necessary information.
 - It offers high-visibility through symbols & letters with LED light.
 - The LCD monitor also shows PTO rev., mal-function guide, fuel indicator and over-heating.
- A. BASIC DISPLAY MODE
ENGINE RPM, PTO RPM (rear/mid), NEUTRAL, HOUR METER
 - B. LAMP DISPLAY MODE
ONE SIDE BRAKE(HST), 4-WD, PTO OPERATING DISPLAY(REAR), CRUISE CONTROL(HST)
 - C. WARNING DISPLAY MODE
FUEL, TEMPERATURE, CHARGING, ENGINE OIL PRESSURE

Contemporary Design

The new EX cabs from Kioti feature a sleek design with the premium fit and finish that Kioti is known for in their tractors and cabs. Inside the cab, operator safety and comfort are foremost.



Safe Cabin

All Kioti cabs meet or exceed EEC/OECD safety regulations while still providing excellent visibility to the front, rear and sides. The rear roof position of the cab's air conditioning and heating unit also allows for greater visibility of the loader and loader attachment in the full lift position.

Environmentally Friendly Engines

The exceptionally quiet Kioti Diesel engines produce little vibration at working RPMs and meet or exceed all EPA and Europe regulations through optimal combustion and fuel economy.

Simple Maintenance

Kioti tractors are designed for easy access and simple maintenance. The hood opens completely exposing the top of the engine and side panels are easily removed to expose all daily service check areas.





Servo HST applied

Regardless how big the load is, with the luxurious servo HST that controls a constant pedal operating power, an operator can reduce his fatigue even under a long period of working hours.

- Requiring much lighter pedal operating power and with lesser shock, vibration & noise than mech. type of HST tractors.
- Two separate pedals applied for forward and reverse movement.
- Brake pedal installed in the left side on HST tractors.


a Cruise Control

b PTO Select Switch c PTO Switch



High visibility Head and work lights

A one piece, dual headlight component is incorporated into the slopping design of the hood and front and rear cab working lights provide excellent illumination at night or when visibility is reduced due to fog or dust. All KIOTI exterior lighting meets or exceeds safety and operation regulations.



Hi/Mid/Low speed ranges

The HST models feature a Hi/ Mid / Low range transmission to maximize performance and efficiency. With three ranges, speed and power can be matched to any job.



Hydrostatic Transmission (HST)

The HST models feature performance-proven, heavy-duty HST drives that deliver power smoothly and efficiently. Two HST pedals control allows speed and direction changes without clutching or shifting. With the DAEDONG HST system, your hands remain free for steering and implement control.



Single lever joystick

The operation of the front-end loader is made easier by the use of a single lever joystick. The joystick allows you to perform all loader functions with a single lever. The lever automatically returns to neutral and the loader stops in place when the joystick is released. A float position allows the bucket free floatation over the ground surface.



Increased Hydraulic Pump Capacity

With increased hydraulic pump capacity by 15%, as the speed of running rear implements such as front loader, backhoe, etc is much faster. The work efficiency can be much improved.



Hydraulic filter for only HST tractors

With an additional hydraulic filter on HST tractors can prevent HST damage by something foreign.

More steps MLS valve applied

- Speed control - control drop speed or lock into any position.
- Hydraulic control system: draft, position and mixed control.
- No. Of an attachable rear hydraulic valves up to 2pcs.




Hydraulic independent PTO

Rear PTO is standard and is easily engaged by simple push of a button and selecting either manual or automatic operation. A mid-PTO is optional and both rear and mid-PTOs can be operated independently or simultaneously.

Loader Specifications

Loader Model	KL140	KL150
A. Maximum lift height to pivot pin	2,635mm(103.7")	2,754mm(108.4")
B. Maximum lift height under level bucket	2,345mm(92.3")	2,464mm(97.0")
C. Clearance with bucket dumped	1,805mm(71.1")	1,922mm(75.7")
D. Reach at maximum lift height	335mm(13.2")	319mm(12.6")
E. Maximum dump angle	58.0°	58.0°
F. Reach with bucket on ground	2,000mm(78.7")	1,893mm(74.5")
G. Maximum rollback angle	48.0°	48.0°
H. Digging depth	275mm(10.8")	160mm(6.3")
J. Overall height in carry position	1,320mm(52.0")	1,437mm(56.6")
L. Bucket depth	584mm(23.0")	584mm(23.0")
M. Bucket height	563mm(22.2")	563mm(22.2")
N. Bucket length	798mm(31.4")	798mm(31.4")
O. Bucket width	1,524mm(60.0")	1,702mm(67.0")
Lift capacity to maximum height-at pivot pin	977Kg(2,154lbs)	1,450Kg(3,198lbs)
Breakout force-at pivot pin	1,396Kg(3,079lbs)	2,073Kg(4,570lbs)
Boom cylinder	35x60x700x480STmm 1.38x2.36x27.56x18.90ST"	35x60x700x480STmm 1.38x2.36x27.56x18.90ST"
Bucket cylinder	35x60x998x332STmm 1.38x2.36x39.29x13.07ST"	35x60x998x332STmm 1.38x2.36x39.29x13.07ST"

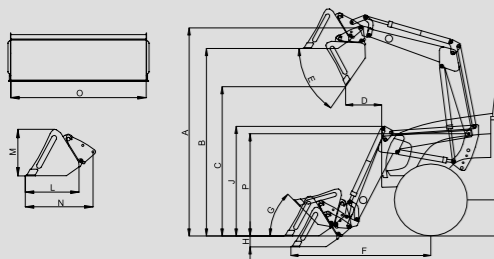

Front Loader

The Kioti KL140 and KL150 front loader are specially designed for the EX35 and EX40/45/50 tractors, providing efficient performance with single joystick control. The Kioti loader is designed for quick and easy attachment/detachment.



Loader Model : KL150 Tractor Model : EX35/EX40/EX45/EX50


Backhoe Specifications

Backhoe Model	KB2465	KB2475	KB2485
A. Digging Depth (two foot flat bottom)	1940mm(76.3")	2280mm(89.7")	2400mm(94.4")
B. Reach from center line of Swing Pivot	2875mm(113.1")	3180mm(125.1")	3460mm(136.1")
C. Loading Height (bucket at 60°)	1615mm(63.6")	1840mm(72.4")	2040mm(80.3")
D. Maximum Leveling Angle	10°	10°	10°
E. Swing Arc	180°	180°	180°
F. Transport Height (maximum)	1960mm(77.2")	2120mm(83.5")	2360mm(92.9")
G. Transport Overhang	1105(43.5")	1245mm(49.0")	1280mm(50.4")
H. Bucket Rotation	180°	180°	180°
I. Stabilizer Spread (down position)	1745mm(68.7")	1745mm(68.7")	1745mm(68.7")
J. Stabilizer Spread (up position)	1180mm(46.4")	1180mm(46.4")	1180mm(46.4")
K. Angle of Departure	21°	21°	21°
Shipping Weight - Backhoe (without bucket)	470 kg(1,036 lbs)	485 kg(1,069 lbs)	500 kg(1,102 lbs)
Bucket Digging Force	1278 kg(2817.5 lbs)	1278 kg(2817.5 lbs)	1700 kg(3,748 lbs)
Dipperstick Digging Force	793 kg(1,748 lbs)	955 kg(2,105 lbs)	1000 kg(2,205 lbs)
Operating Pressure	170 bar(2,466 psi)	170 bar(2,466 psi)	170 bar(2,466 psi)

Cylinder	Bore DIA			Retracted Length			Stroke			Rod DIA		
	KB2465	KB2475	KB2485	KB2465	KB2475	KB2485	KB2465	KB2475	KB2485	KB2465	KB2475	KB2485
Boom	2.75	2.75	2.75	23.07	24.41	25.04	15.12	15.12	15.20	1.57	1.57	1.57
Bucket	2.36	2.36	2.36	21.06	21.06	24.80	11.77	11.77	15.65	1.38	1.38	1.38
Dipperstick	2.36	2.75	2.75	20.63	23.50	27.67	11.93	14.84	19.88	1.38	1.57	1.57
Swing	2.36	2.36	2.36	15.67	15.67	15.67	8.78	8.78	8.78	1.38	1.38	1.38
Stabilizer	2.36	2.36	2.36	17.56	17.56	17.56	10.31	10.32	10.31	1.38	1.38	1.38

Bucket	Teeth Q'ty	Struck Capacity	Heaped Capacity	Shipping Weight
9' Bucket	3	0.73 cu. ft.	0.87 cu. ft.	46 lbs
12' Bucket	3	1.01 cu. ft.	1.24 cu. ft.	56 lbs
16' Bucket	3	1.38 cu. ft.	1.76 cu. ft.	64 lbs
18' Bucket	4	1.56 cu. ft.	2.02 cu. ft.	70 lbs
24' Bucket	5	2.11 cu. ft.	2.82 cu. ft.	94 lbs
36' Bucket	6	2.78 cu. ft.	4.00 cu. ft.	114 lbs

Specifications may vary depending on tractor model, tire size and bucket used.

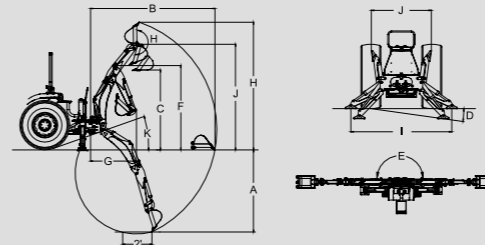

Backhoe

The subframe-mounted KB2465/KB2475 and KB2485 backhoes can be easily attached and detached using locking pins and quick-connect hydraulics. The Backhoe's offset subframe design provides a large approach angle for the easiest trailer loading in its class.



Backhoe Model: KB2465/KB2475/KB2485 Tractor Model: EX35/EX40/EX45/EX50