



Mowers

- Orchards and Vineyards • Mixed crops • Wide green areas • Set - aside
- For tractors from 70 to 130 HP

FERRI[®]




Mowers for grass and twigs

- Orchards and Vineyards • Mixed crops • Wide green areas
- Set - aside • For tractors from 70 to 130 HP
- (Ø max 5 cm)




Equipment

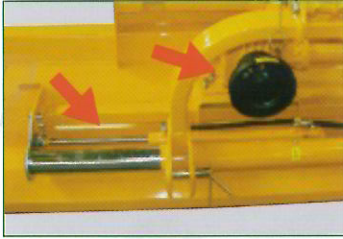

Gearbox with overrun clutch prearranged for pto at 540 or 1000 rpm.
Side shift linkage with hydraulic cylinder of 450 mm for all models.



Toothed belts drive (4 belts SPB).

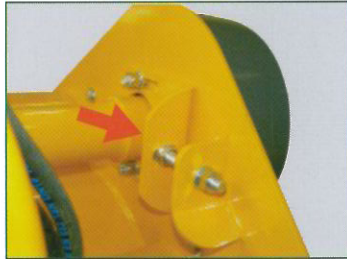

Belts tightener with screw for belts tension.



Rear roller adjustable in 6 different positions.



Anti roll bar of the 3.point hitch with bearings (it permits the 3.point displacement and shock-resistant during road transport).



Adjustable skid under the gearbox.



Gearbox with outward greaser.




Rear tubular as machine reinforcement. It is used also as anchoring of wheels (option).

Rotor Ø 194 mm - thickness 10 mm
Rotor with drop forged lugs
4 rows of fixed static serrated blades
Rear roller Ø 168 mm - thickness 6 mm
Rear roller adjustable in 6 different positions
Pto shaft
Ø rotor pin 55 mm
Ø rear roller pins 35 mm
Front guards with metal flaps and rear abrasion resistant guards

Technical specifications	MH 230	MH 250	MH 280	MH 300
Width of cut	m 2,36	2,56	2,76	2,96
Side shift	m 0,45	0,45	0,45	0,45
Size	cm 255x120 x103 (H)	275x120 x103 (H)	295x120 x103 (H)	315x120 x103 (H)
Weight	Kg 825	870	920	960
Required tractor power	HP 70/130	75/130	80/130	85/130
Toothed belts	n° 4 SPB	4 SPB	4 SPB	4 SPB
Pto	RPM 540/1000*	540/1000*	1000/540*	1000/540*
Rotor speed	RPM 1900/2000*	1900/2000*	2000/1900*	2000/1900*
Blade tip speed	m/sec 50/52*	50/52*	52/50*	52/50*

*on request based on tractor Pto.

Working positions (m)

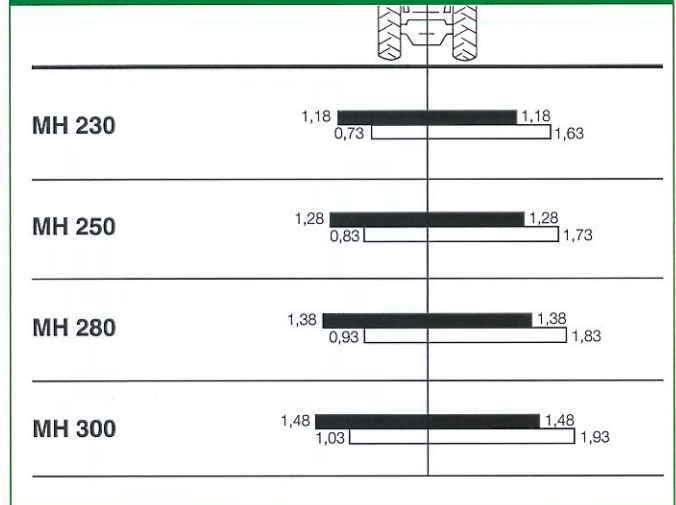

Flails interchangeable on the same rotor

	MH 230	MH 250	MH 280	MH 300
 Forged hammer-blades for: woods, twigs, grass Ø 5 cm max.	22	24	26	28
 Multiuse and straight flails for grass, bushes, shrubs, sticks, wood Ø 4 cm max.	66	72	78	84
 Articulated and straight flails for grass, sticks, shrubs Ø 3 cm max. (Specific rotor)	44+22	—	—	—



FERRI srl
Via C. Govoni, 30
44034 Tamara (FE) Italy
Tel. +39-0532.866866
Fax +39-0532.866851
info@ferrisrl.it
www.ferrisrl.it



RUSTONS ENGINEERING CO LTD.,
Brampton Road, Huntingdon,
Cambs., PE29 3BS. U.K.
Phone: 01480 455151
Fax: 01480 52116
www.reco.co.uk