



TXV 50 BASIC **TXV 60** BASIC

Power available to rotor **38HP**
Max hydraulic engine power **57HP**

TXV 50 ENERGY **TXV 60** ENERGY

Power available to rotor **49HP**
Max hydraulic engine power **57HP**

Max. kinematics



Hydraulic flail-hedger mowers

• Green maintenance • Agriculture • Tractors from 80 up to 110 HP



TechnoTeam



Equipment	BASIC TXV	ENERGY TXV
Floating (flail head is free to float to follow ground contours).	●	●
Lift float (via accumulator).	●	●
Oil cooler with thermostat.	●	●
"BI-METAL" (steel+bronze) bushings on the 1st and 2nd rams pins and carbonised steel bushings on joints.	●	●
"High Performance" cast iron worm gearbox.	□	●
Low pressure proportional controls with joystick.	□	□
Prepared beforehand to work in the classic rear position	□	□
Cable controls	●	●
Data monitor	□	□
Hours meter	□	□
Totally independent hydraulic system	●	●
Direct drive	●	●
Belts drive (N°3)	□	-

● Standard □ Optional


Technical specifications

Mod.		BASIC TXV 50	BASIC TXV 60	ENERGY TXV 50	ENERGY TXV 60
		Max. horizontal reach	m	4,70/5,20	5,50/6,20
Weight	Kg	1245	1295	1255	1305
Hydraulic oil capacity	l	210	210	210	210
Three point linkage	Cat.	II	II	II	II
Pto	RPM	540	540	540	540
Power available to rotor	HP	38	38	49	49
Hydraulic engine power	HP max.	57	57	57	57

Technical specifications of flail head


	TN - TNC - TNCD 120
Width of cut	m 1,20
Rotor speed	RPM 3000
Blade tip speed	m/sec 66

Hydraulic breakaway with auto-return system.

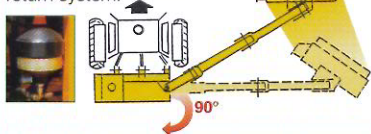

Tractors (recommended features)					Min. weight	Min. width
	80	90	100	110		
HP Tractor					Kg	m
TXV 50	[Bar chart showing compatibility]				3000	2,00
TXV 60	[Bar chart showing compatibility]				3400	2,20

Working positions

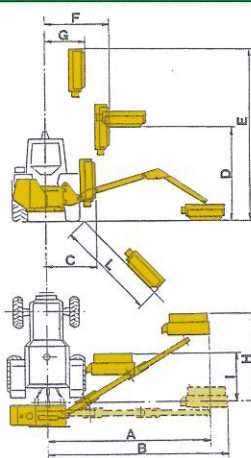

	TXV 50	TXV 60
A m	4,70	5,50
B m	5,20	6,20
C m	1,80	1,80
D m	3,40	4,20
E m	4,80	5,80
F m	2,20	2,50
G m	1,80	1,80
H m	2,70	3,20
I m	1,60	1,60
L m	3,00	3,80

Accessories

TR13-TR22 Cutter bar



CS 150 Cutter bar



BD4 Rotating disk



SB45 Bank mower



FF60 Ditch cleaners



n°36 + 18 Multi-use/straight blades for: grass, shrubs, sticks, wood. Ø max cm 5



n°18 T-Hammer blades. Ø max cm 6



n°48 + 24 Articulated "Y" + straight blades for: grass, shrubs. Ø max cm 2



n°24 Hedgecutting flails for: grass, shrubs, hedge. Ø max cm 2



n°24 Hedgetrimming flails for: grass, hedge. Ø max cm 1



n°18 Tournring blades for wood. Ø max cm 8



Electronically balanced. The rotor is fitted with balance plates at each end.



6 rows rotor.