

TM47 SCORPION

FARM

Max rotor power:
HP 35

Max hydraulic motor power:
HP 45

 m 4,63

 HP 50 ÷ 70

Strong points



Compact in transport



Compact on hedges



Compact on verges












PATENTED

Hydraulic flail-hedger mowers

• Agriculture • Green maintenance • Tractors from 50 up to 70 HP

FERRI®


Equipment	TM47 scorpion
 Floating (flail head is free to float to follow ground contours)	●
 Lift float (via accumulator)	□
 "OVERLAP" rotor with double row spiral flails	●
 Drop forged arm pivots	●
 Drop forged flail head linkage	●
 Second arm cranked backwards allowing very compact working position behind the tractor (Patented)	●
 Oil cooler with thermostat	□
 ELECTRA "Soft-Start" Mono lever electric controls	□
 Reversible rotor	●
Cast iron pump and cast iron motor group 3 (45HP)	●
Totally independent hydraulic system	●
Direct drive	●
Front and rear rubber resistant guard for flail head	●

● Standard □ Optional

Technical specifications		TM47 SCORPION FARM
Mod.		
Max. horizontal reach	m	4,63
Weight	Kg	839
Hydraulic oil capacity	l	125
Three point linkage	Cat.	II
Pto	RPM	540

Working positions

TM47 Farm		
A	m	4,63
B	m	3,17
C	m	1,10
D	m	3,51
E	m	3,09
F	m	1,59
G	m	0,86
H	m	4,19

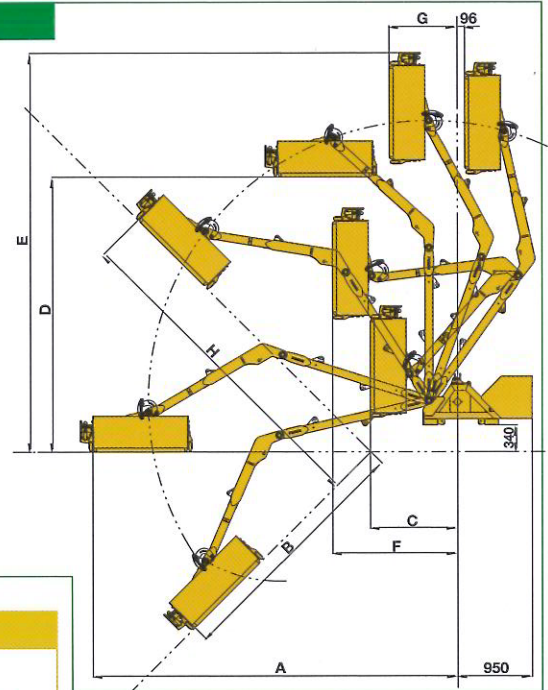

Flail head




TI 120
direct drive

Technical specifications for flail head		
TI 120		
Width of cut	m	1,20
Rotor speed	RPM	3100
Flail head angle		235°
Max rotor power	HP max	35
Max hydraulic motor power	HP max	45

Tractors (recommended features)				Min. weight	Min. width
HP Tractor	50	60	70	Kg	m
TM 47 Farm				2800	1,90

Accessories

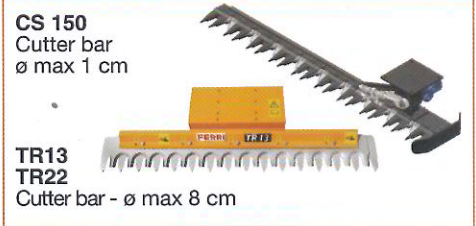

TI 120		
Multi-use blades: grass, shrubs, bushes, sticks, wood. Ø max 3 cm	Spoon blades for: grass, shrubs, bushes, stick, wood. Ø max 2 cm	"T" hammers for: wood. Ø max 4 cm
		
n° 44	n° 22	n° 22